

TECHNICAL FEATURES

- 1、USB/FM/BLUETOOTH/8 ZONES
- 2、POWER: 800W-2000W
- 3、OUTPUT: 4—16Ω/100V
- 4、Frequency response: 40Hz-18KHz±0.5dB
- 5、Total Harmonic Distortion: ≤0.2%(RMS)
- 6、POWER SUPPLY: AC220V 50-60HZ
- 7、SIZE: 484×370×88(mm³)/484×420×88(mm³)

NOTE


- 1)AC220(50Hz-60Hz)
- 2)Don't Put the Vents to Avoid Emission Effect.
- 3)To Avoid Unnecessary Load Circuit.
- 4)When Play MP3,If Mic and Circuit are Not Used,Pls Put Off the Knob.
- 5)When the Machine is Abnormal, Non-professional Persons Do not Open and Maintain It, to Avoid Electric Shock Accidents.

Background music system


PUBLIC ADDRESS AMPLIFIER

USB/FM/BLUETOOTH/8 ZONES


MANUAL

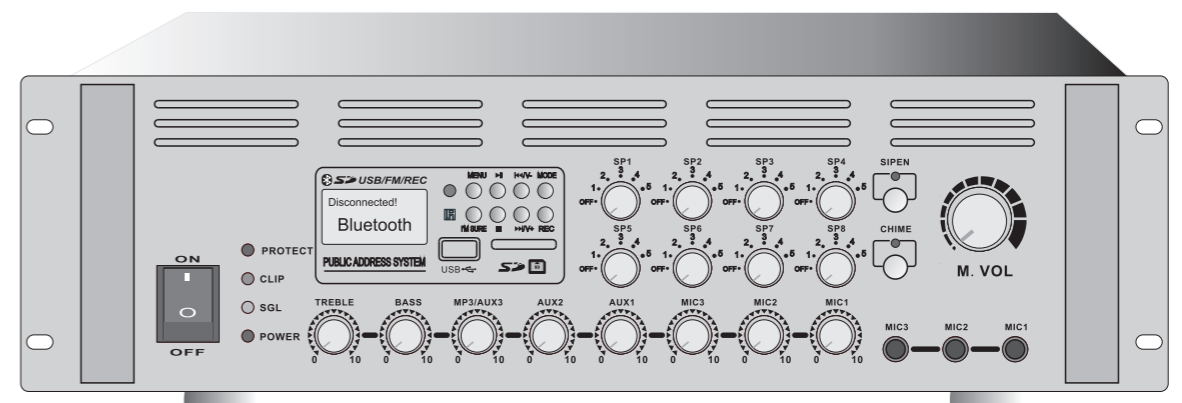

FRONT PANEL

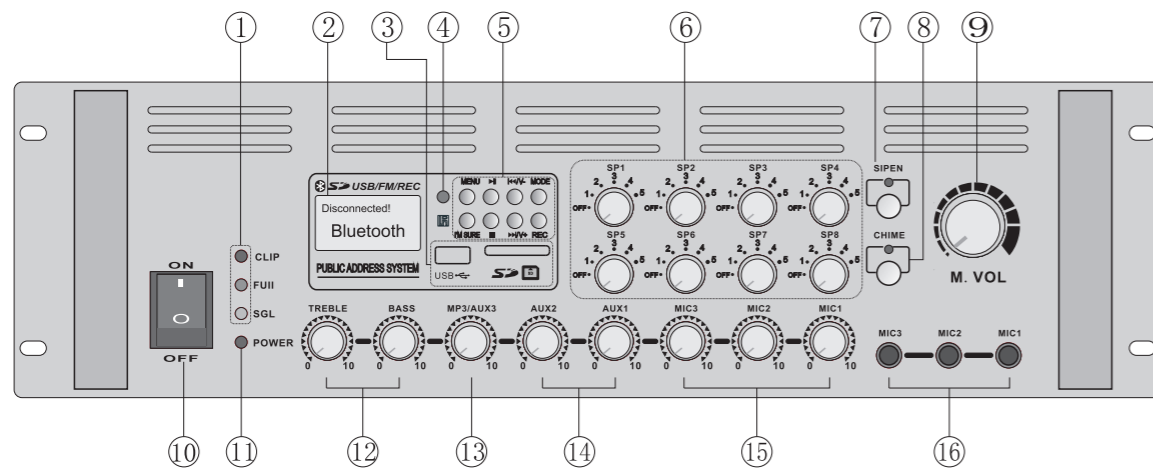

BACK PANEL

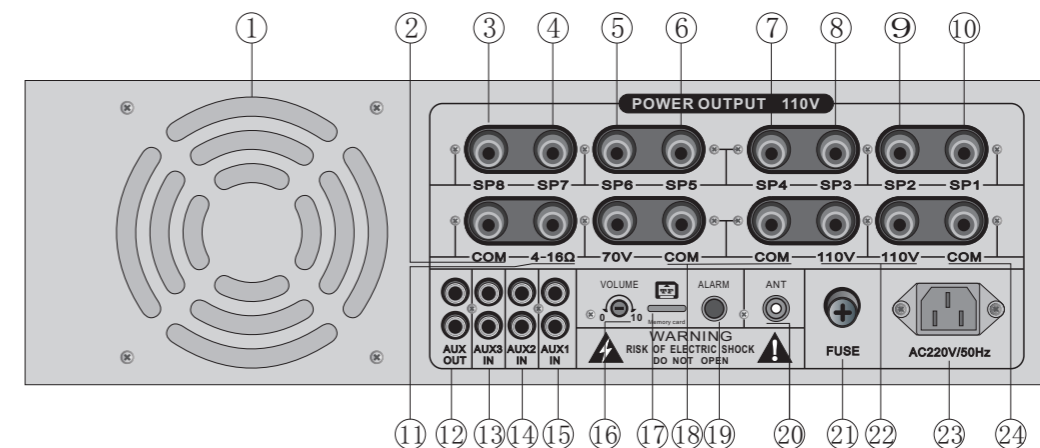

① LEVEL INDICATOR LIGHT:WHEN CLIP LIGHTING,AMPLIFIER OUTPUT MAX POWER

② DISPLAY UNIT:SONG NAME/PLAYING SCHEDULE/PLAYING MODE

③ USB/SD INTERFACE:WHICH CAN PLAY USB DISK OR SD

④ REMOTE CONTROL RECEPTION

⑤ MENU CONTROL KEY

▶▶ WHEN USB/BLUETOOTH, PLAY&PAUSE, WHEN FM,CHANNEL SEARCHING

◀◀/V-WHEN USB/BLUETOOTH,PRE SONG,HOLD DOWN IT FOR

2 SECONDS, VOLUME DOWN, WHEN FM, PRE CHANNEL.

MODE:USB/FM/BLUETOOTH SWITCHER

ENSURE

■ WHEN MP3, PLAY FROM THE BEGINNING

▶▶/V+ WHEN USB/BLUETOOTH,NEXT SONG,HOLD DOWN IT FOR

2 SECONDS, VOLUME UP, WHEN FM, NEXT CHANNEL.

REC:WHEN LINE,we can record the voice of amplifier to the

USB disk/SD card.

⑥ 8 zones volume control,which can turn up/turn down each zones

⑦ independently.

SIREN SWITCH:which can play siren voice.

⑧ CHIME SWITCH:which can play Airport warning tone.

⑨ MASTER VOLUME CONTROL

⑩ ON/OFF

⑪ POWER INDICATOR LIGHT:when starting up/breaking down,it keeps on.

⑫ BASS & TREBLE

⑬ Mp3 VOLUME CONTROL:control USB/bluetooth/FM/AUX3 volume.

⑭ AUX1/AUX2 VOLUME CONTROL

⑮ MIC1/MIC2/MIC3 VOLUME CONTROL

⑯ MIC INPUT:MIC1 with priority

① VENTILATION OPENING:plz donot block the vent.

② POWER OUTPUT COM:negative pole.

③ SP8 POWER OUTPUT:which can connect 800W speaker at most.

④ SP7 POWER OUTPUT:which can connect 800W speaker at most.

⑤ SP6 POWER OUTPUT:which can connect 800W speaker at most.

⑥ SP5 POWER OUTPUT:which can connect 800W speaker at most.

⑦ SP4 POWER OUTPUT:which can connect 800W speaker at most.

⑧ SP3 POWER OUTPUT:which can connect 800W speaker at most.

⑨ SP2 POWER OUTPUT:which can connect 800W speaker at most.

⑩ SP1 POWER OUTPUT:which can connect 800W speaker at most.

⑪ 4-16 Ohm POWER OUTPUT

⑫ AUX OUTPUT

⑬ AUX3 INPUT

⑭ AUX2 INPUT

⑮ AUX1 INPUT

⑯ which can control volume of warning tone.

⑰ TF card slot

⑱ POWER OUTPUT COM:negative pole.

⑲ ALARM Input Short Circuit signal power amplifier will automatically turn on SIREN alarm function

⑳ FM ANT

㉑ FUSEHOLDER

㉒ 110V POWER OUTPUT,which can connect the speaker (power more than 800W).

㉓ AC220V 50Hz-60Hz

㉔ POWER OUTPUT COM:negative pole.